


(1) Please take out the protect cover ,
and then loose the stylus as diagram A and B .



(2) Replace the new stylus as C , D and E diagram.
Remark: Please loose the cartridge wire one by one
to connect the wire in correct position.

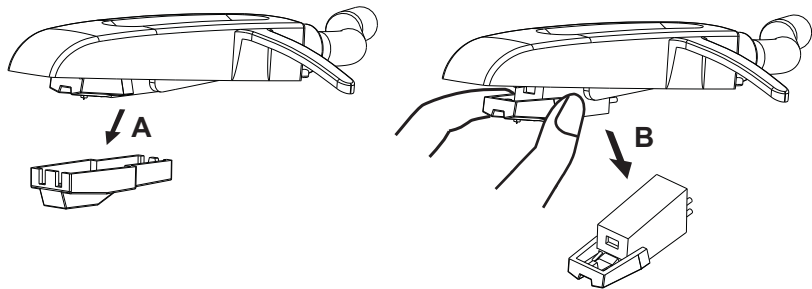